


# STOCKTON WHEEL

PERFECTING THE WHEEL SINCE 1883

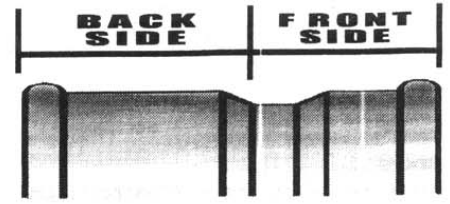


## CUSTOM FABRICATION ORDER FORM

### ORDER INFORMATION

Name \_\_\_\_\_  
 Address \_\_\_\_\_  
 City \_\_\_\_\_  
 State Zip \_\_\_\_\_  
 Phone ( )  \_\_\_\_\_  
 Cell ( ) \_\_\_\_\_  
 Work ( )  \_\_\_\_\_  
 Fax ( ) \_\_\_\_\_  
 e-mail \_\_\_\_\_  
**Payment:** MC Visa AE Disc  
 Cash Check/MO  
 CC#  \_\_\_\_\_  
 Ex \_\_\_\_\_

### FRONT

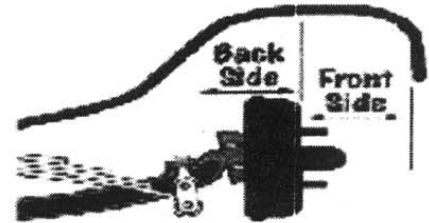

### FRONT DIMENSIONS


Front Side \_\_\_\_\_  
 Back Side \_\_\_\_\_  
 Wheel Size \_\_\_\_\_ Bolt Circle \_\_\_\_\_  
 Drum/Caliper O.D. \_\_\_\_\_ Bore \_\_\_\_\_  
 Clearance for tie rod ends, Suspension, etc:  
 \_\_\_\_\_

Notes: \_\_\_\_\_  
 \_\_\_\_\_

Wheels are built to customers specifications. Please refer to Stockton Wheel Service "Wheel building and Specification Chart" For additional information.

RIM SIZE		Standard Backsides	
14X5	3-3.625	16X4.5	2.5-3.5
14X6	3.5-4.5	16X6	3.5-4.5
14X7	4.0-5.5	16X7	4-5.5
15X5	3.3-625	16X8	4.0-6.5
15X6	3.5-4.5	16X10	4.5-8
15X7	4.0-6.5	16X12	45.11
15X8	4.0-6.5	17X7	4.5-5.12
15X10	4.5-8	17X8	4.25-6.5
15X12	4.5-11	17X9	5.12-7.5
15X14	4.5-12	<b>Reversed offsets available</b>	

### REAR

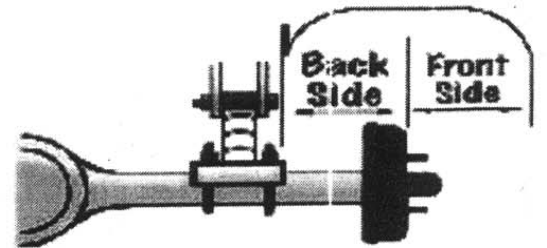

### REAR DIMENSIONS

Front Side \_\_\_\_\_  
 Back Side \_\_\_\_\_  
 Wheel Size \_\_\_\_\_ Bolt Circle \_\_\_\_\_  
 Drum/Caliper O.D. \_\_\_\_\_ Bore \_\_\_\_\_  
 Clearance for tie rod ends, Suspension, etc:  
 \_\_\_\_\_

Notes: \_\_\_\_\_  
 \_\_\_\_\_